

Preduzeće za proizvodnju elektroprovodnika “ELKOK” AD Kosjerić, Olge Grbić 3

info@elkok.co.rs

www.elkok.co.rs

tel: + 381 (31) 781 121

Galvanized steel strip for Earthing


STANDARDS

SRPS EN ISO 2178

SRPS EN ISO 1461

SRPS EN 62561-2

SRPS C.K5.030

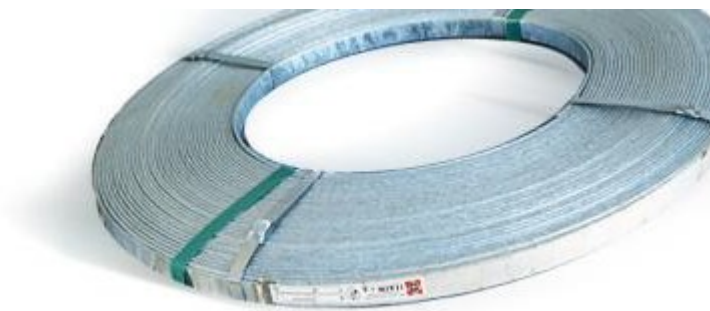

PRODUCT DESCRIPTION

Hot rolled strip with zinc coating applied by the hot-dip galvanizing method.
Mass of coated zinc is 505 gr/m², and zinc coating thickness is 70μ (mean value).

AREA OF USE

For earthing of overhead lines, in industry facility plants, residential facilities, etc.

PACKAGING

Galvanized steel strip is packaged in 50kg or 25 kg rolls.

TECHNICAL CHARACTERISTICS

Dimensions (mm)	Zinc mass (g/m ²)	Longitudinal mass (kg/km)
20x3	505	517
25x3	505	632
30x3	505	749
40x3	505	982
25x4	505	817
30x4	505	972
40x4	505	1283